


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2022.01.05	CLARA





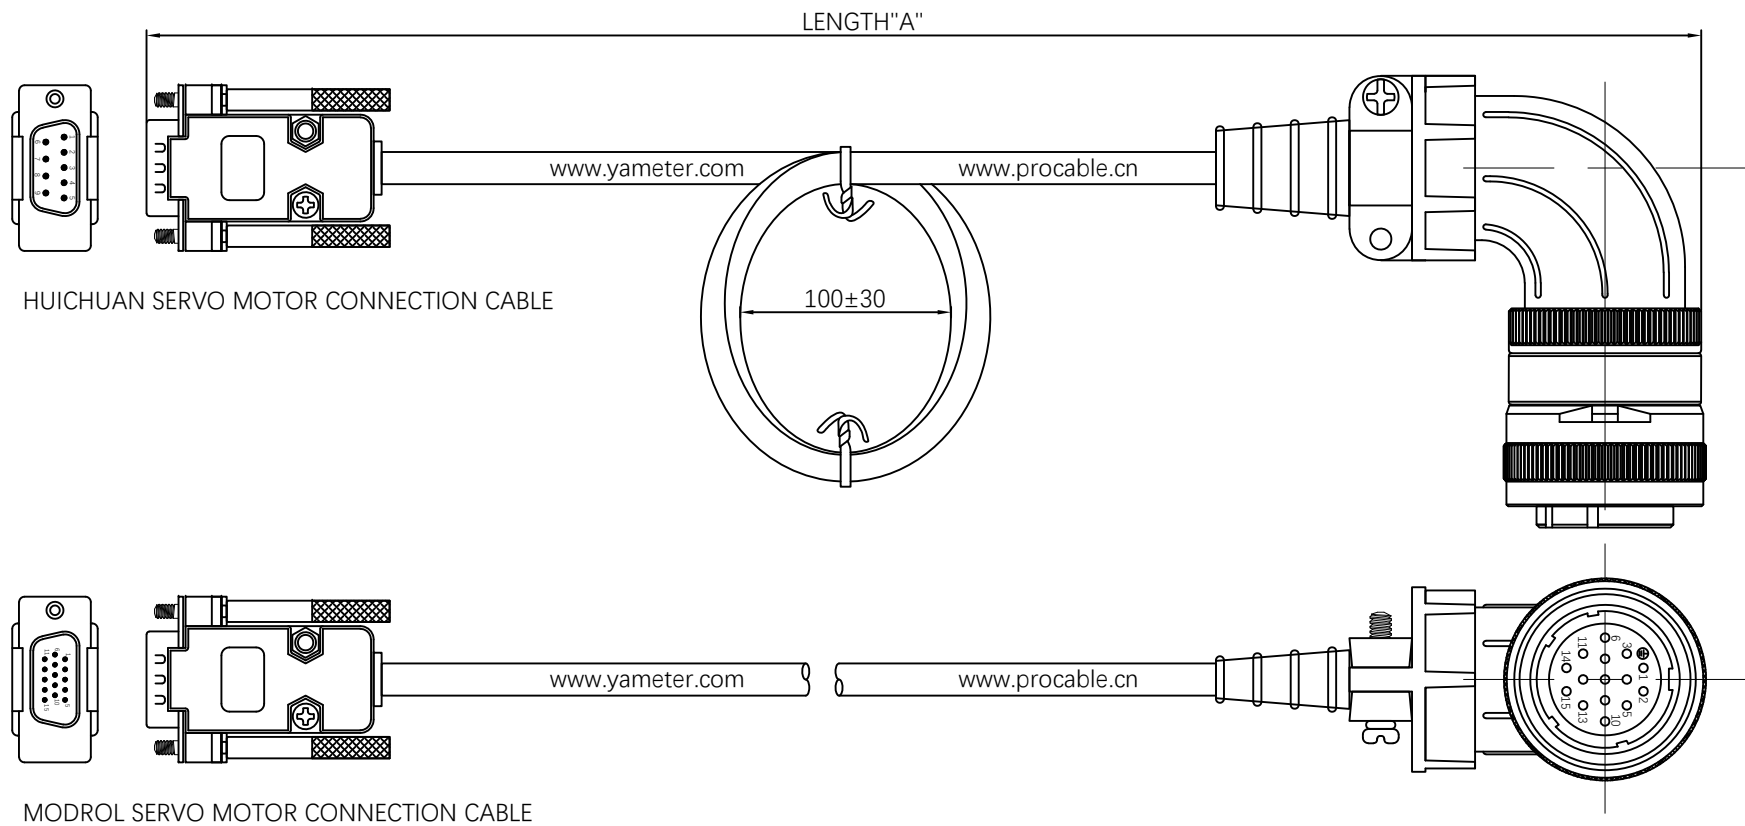

Material specifications  
Contact: Brass with gold plated  
Insulation: PA, Black, UL94V-0  
Housing: Brass with nickel plated

Mechanical properties  
Minimum bending radius: Fixed installation: 8x Cable OD  
Flexible installation: 10x Cable OD

Electrical testing of finished cable  
100% Open / Short / Miswiring testing  
Insulation resistance: DC300V 10MΩ  
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE SERVO MOTOR CABLE ASSEMBLY					
DIMENSIONS	TOLERANCE						
x	±0.5	CUSTOMER	-	CUSTOMER PART NO.	-		
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0						
> 501	+3W/-0 of length	DRAWN BY	CLARA	PART NUMBER	-	SIZE	REV
ANGLES		CHECKED BY	BILL	DRAWING NUMBER	servo-motor-cables	A3	A
x°	±1°	APPROVED BY	KIMKEE	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.