


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1		2		3		4		5		6		7		8		9		10		Customer drawing	
REV	ECN NO		DESCRIPTION					DATE		APPROVED		<div>RoHS</div>									
A	-		NEW RELEASED					2020.07.28		CLARA											

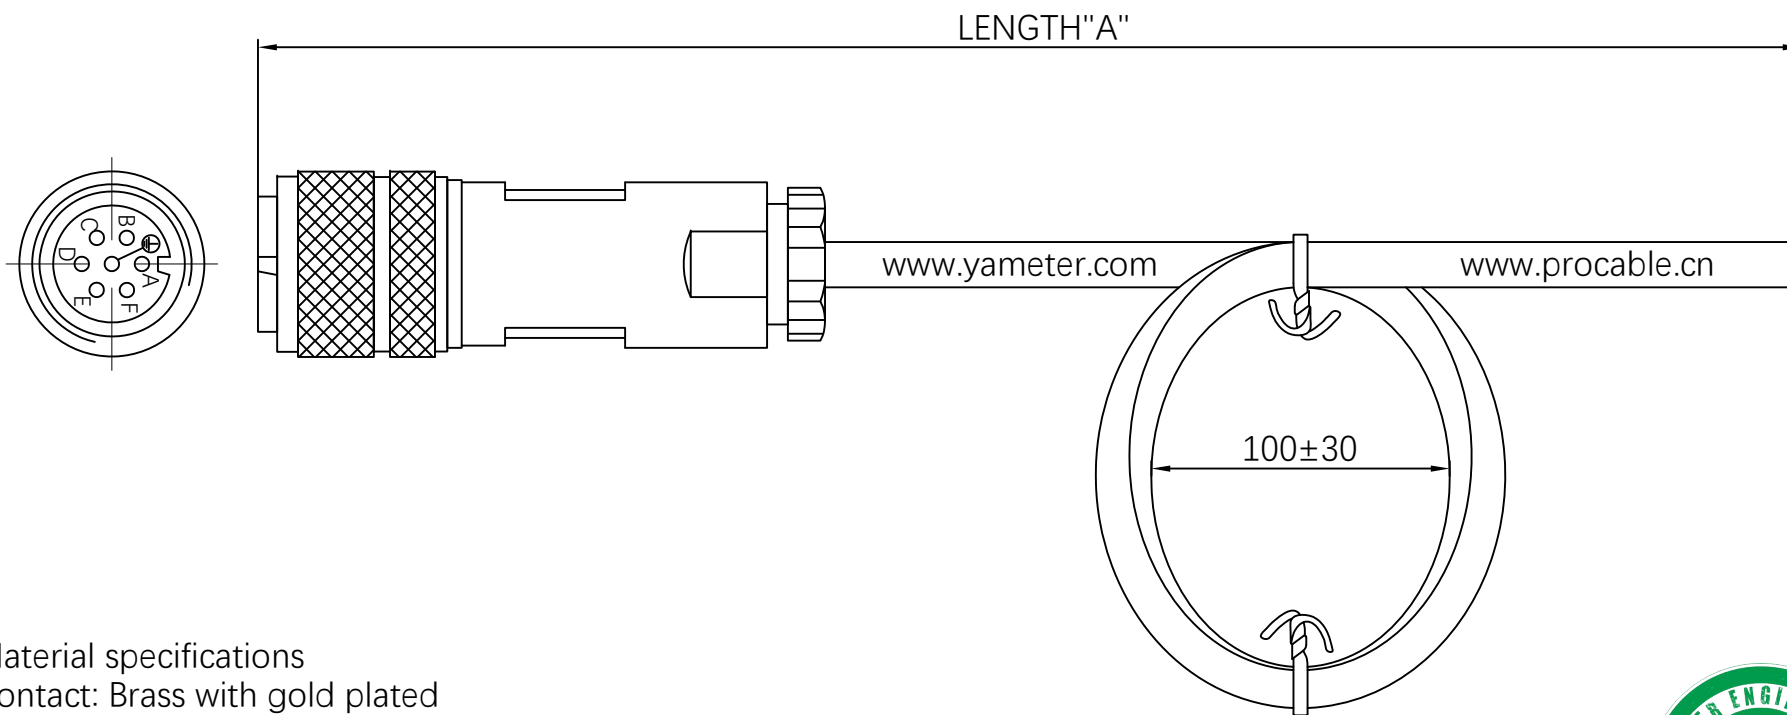

Material specifications

Contact: Brass with gold plated

Insulation: PA, Black, UL94V-0

Housing: PA, Black, UL94V-0

Mechanical properties

Minimum bending radius: Fixed installation: 8x Cable OD

Flexible installation: 10x Cable OD





Electrical testing of finished cable

100% Open / Short / Miswiring testing

Insulation resistance: DC300V 10MΩ

Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE VALVE SERVO ENCODED CABLE SERVO MOTOR CABLE		<div> Yameter</div> <div></div>			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-	 	
> 501	+3%/-0 of length	DRAWN BY	CLARA	PART NUMBER	servo-valve-cable	SIZE A4	REV A
ANGLES		CHECKED BY	BILL	DRAWING NUMBER	servo-valve-cable		
x°	±1°	APPROVED BY	KIMKEE	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1