Customer drawing

REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	–	NEW RELEASED	2015.09.11	CLARA

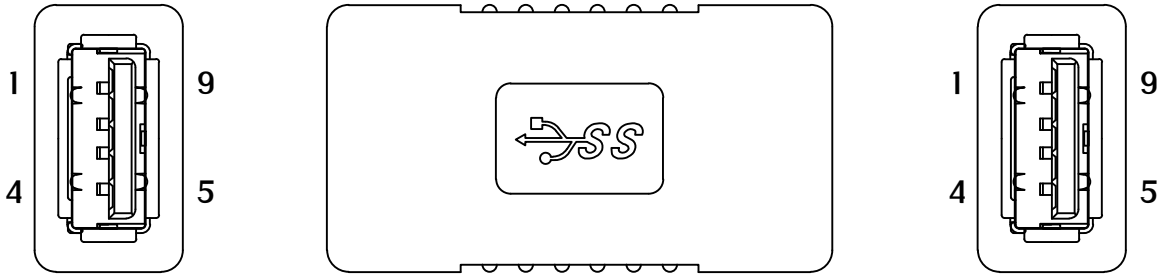

Electrical specifications:
Use of voltage range: 30V
Current range: 0.5A
Temperature range: -20°C~+80°C

Material specifications
Connector: USB3.0 Socket
Overmolding: Black PVC

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC150V 10MΩMin
Conductor resistance: 3Ω Max

Manufacturer: Bomcan

BOMCAN ENGINEERING PDF Format D.C 2011/65/EC www.bomcan.com

BOMCAN

This drawing contains information that is proprietary to BOMCAN and should not be used without written permission.
Powered by bomcan.com

DESCRIPTION	STANDARD USB3.0 SOCKET/USB3.0 SOCKET ADAPTER					
DWG NO	USB ADAPTER	BOMCAN PART No	USB3-ASAS-ADAPTER			
DRAWN BY	CLARA 2015.09.11	CUSTOMER P/N	–			
CHECKED BY	CALEB 2015.09.11	SIZE: A4	SHEET 1 of 1	UNIT MM	SCALE FREE	Third angle projection
APPROVED BY	BILL 2015.09.11	REV: AA				

www.bomcan.com